




#### Product Information Palett Ceiling/Wall Absorber

- 50mm highly absorbing acoustic boards in absorption class A.
- Completely covered in white fabric to acquire high light reflection; 83%.
- Reversible (practical in case of damage, stains etc.).
- Increased acoustic effect when assembled with an airspace of 50mm.
- Simple assembling with white epoxy clamps or steel frames.
- Surface that handles dusting and vacuuming.
- Thickness 50mm. Format 1200x1000, 1200x600

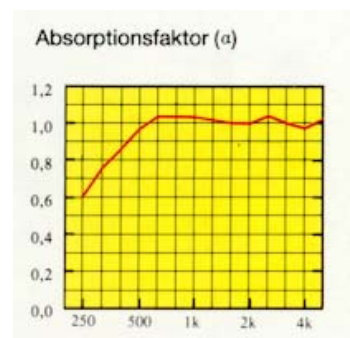

#### Fire resistance

- Fulfils the requirements for non-combustible materials and surface finish classification 1.

#### Absorption

- Absorption factor by a 45mm air space 250-4000Hz. Measurements made according to the room method by CTH and SP (Chalmers University of Technology and the Swedish Testing and Research Institute).

**B&L Lund AB**

**Address:** Samuelsgården, 521 98 BRODDTORP **Phone:** +46 (0)500-491 355

[www.absoflex.se](http://www.absoflex.se) **E-mail:** info@absoflex.se